



Series: V, wheel Ø 80-200 mm

**Wheels with standard solid rubber tyres,
pressed steel rim,
reinforced design**

50 - 300 kg



Tyres: Standard solid rubber, colour black, 80° shore A.
Rims: Pressed steel, tubular steel hub,
plain, roller or ball bearing,
zinc-plated.

**This special Blickle rim design is extremely strong, even
under extreme shock and impact loads. Smooth and
elegant design ("Die gute Industrieform" design award).**

5

Further information on the internet: www.blickle.de

Wheels

Detailed description: Page 33.

Ref. No.	Wheel Ø (D) [mm]	Tyre width (T2) [mm]	Load capacity [kg]	Bearing version	Axle bore Ø (d) [mm]	Hub length (T1) [mm]
V 80/12R	80	25	50	Roller bearing	12	35
V 100/15R	100	30	70	Roller bearing	15	45
V 125/15R	125	37,5	100	Roller bearing	15	45
V 140/15R	140	37,5	115	Roller bearing	15	45
V 162/20G	160	40	135	Plain bearing	20	60
V 162/20R	160	40	135	Roller bearing	20	60
V 182/20G	180	50	170	Plain bearing	20	60
V 182/20R	180	50	170	Roller bearing	20	60
V 184/20-50K	180	80	300	Ball bearing	20	50
V 202/20G	200	50	205	Plain bearing	20	60
V 202/20R	200	50	205	Roller bearing	20	60
V 202/25R	200	50	205	Roller bearing	25	60
V 200/20K	200	50	205	Ball bearing	20	60
V 200/25K	200	50	205	Ball bearing	25	60
V 205/20R	200	65	225	Roller bearing	20	60


For further wheel Ø, refer to the following page.

Variants / Accessories




With non-marking
grey tyre

Technical description page	33
Ref. No. extension	-SG
Available for wheel Ø [mm]	80-180x50, 200x50

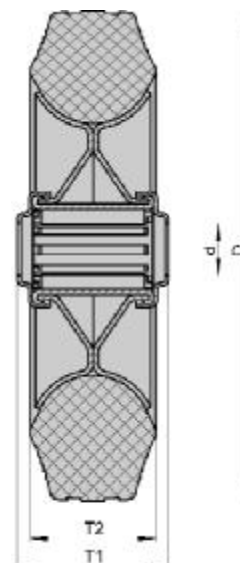

Series: V, wheel Ø 250-400 mm

**Wheels with standard solid rubber tyres,
pressed steel rim**

 295 - 800 kg



Tyres: Standard solid rubber, colour black, 80° shore A.
Rims: Pressed steel, tubular steel hub,
plain, roller or ball bearing,
zinc-plated.
Detailed description: Page 33.

51

Further information on the internet: www.blickle.de

Wheels

Ref. No.	Wheel Ø (D) [mm]	Tyre width (T2) [mm]	Load capacity [kg]	Bearing version	Axle bore Ø (d) [mm]	Hub length (T1) [mm]
V 252/25G	250	60	295	Plain bearing	25	65
V 252/25R	250	60	295	Roller bearing	25	65
V 250/25K	250	60	295	Ball bearing	25	65
V 254/25-65R	250	75	320	Roller bearing	25	65
V 256/20-75K	250	85	350	Ball bearing	20	75
V 256/25-75K	250	85	350	Ball bearing	25	75
V 265/25-75G	265	64	800 (static load)	Plain bearing	25	75
V 282/25R	280	70	385	Roller bearing	25	75
V 302/25-50R	300	60	300	Roller bearing	25	50
V 302/25-75R	300	60	300	Roller bearing	25	75
V 302/30-55G	300	60	700 (static load)	Plain bearing	30	55
V 350/25-80R	350	70	300	Roller bearing	25	80
V 350/25-75K	350	70	300	Ball bearing	25	75
V 400/25-90G	400	75	300	Plain bearing	25	90
V 400/25-75R	400	75	300	Roller bearing	25	75
V 400/25-90R	400	75	300	Roller bearing	25	90
V 402/25-90R	400	80	475	Roller bearing	25	90
V 402/30-90K	400	80	475	Ball bearing	30	90

Variants / Accessories



With non-marking
grey tyre

Technical description page	33
Ref. No. extension	-SG
Available for wheel Ø [mm]	250x60

