

Series: VPP, wheel Ø 80 - 180

Wheels with standard solid rubber tyres, synthetic rim

 50 - 170 kg



Tyres: Standard solid rubber, colour black, 80° shore A or 90° shore A with wheel dimensions of 80x32 mm.
Rims: Made of polypropylene, shock and impact-resistant, corrosion-resistant, plain or roller bearing, colour black.
Detailed description: Page 34.

51

Wheels

Ref. No.	Wheel Ø (D) [mm]	Tyre width (T2) [mm]	Load capacity [kg]	Bearing version	Axle bore Ø (d) [mm]	Hub length (T1) [mm]
VPP 80/12G	80	25	50	Plain bearing	12	35
VPP 80/12R	80	25	50	Roller bearing	12	35
VPP 82/12G	80	32	100	Plain bearing	12	35
VPP 100/12G	100	30	70	Plain bearing	12	45
VPP 100/15G	100	30	70	Plain bearing	15	45
VPP 100/12R	100	30	70	Roller bearing	12	45
VPP 100/15R	100	30	70	Roller bearing	15	45
VPP 125/12G	125	37,5	100	Plain bearing	12	45
VPP 125/15G	125	37,5	100	Plain bearing	15	45
VPP 125/12R	125	37,5	100	Roller bearing	12	45
VPP 125/15R	125	37,5	100	Roller bearing	15	45
VPP 140/15G	140	37,5	115	Plain bearing	15	45
VPP 140/15R	140	37,5	115	Roller bearing	15	45
VPP 150/20G	150	40	135	Plain bearing	20	60
VPP 150/20R	150	40	135	Roller bearing	20	60
VPP 160/20G	160	40	135	Plain bearing	20	60
VPP 160/20R	160	40	135	Roller bearing	20	60
VPP 180/20G	180	50	170	Plain bearing	20	60
VPP 180/20R	180	50	170	Roller bearing	20	60


For further wheel Ø, refer to the following page.

Further information on the internet: www.blickle.de

Variants / Accessories



	With non-marking grey tyre	With stainless steel roller bearing	STARLOCK® stainless steel cap
Technical description page	34	57	79
Ref. No. extension	-SG	-XR	ST-KA 12, 15, 20
Available for wheel Ø [mm]	All sizes	Upon request	All axle bore Ø

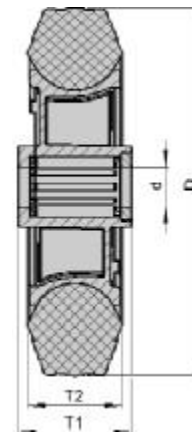

Series: VPP, wheel Ø 200 - 400

**Wheels with standard solid rubber tyres,
synthetic rim**

 205 - 350 kg



Tyres: Standard solid rubber, colour black, 80° shore A.
Rims: Made of polypropylene, shock and impact-resistant, corrosion-resistant, plain, roller or ball bearing, colour black.
Detailed description: Page 34.

5

Further information on the internet: www.blickle.de

Wheels

Ref. No.	Wheel Ø (D) [mm]	Tyre width (T2) [mm]	Load capacity [kg]	Bearing version	Axle bore Ø (d) [mm]	Hub length (T1) [mm]
VPP 200/20G	200	50	205	Plain bearing	20	60
VPP 200/25G	200	50	205	Plain bearing	25	60
VPP 200/20R	200	50	205	Roller bearing	20	60
VPP 200/20K	200	50	205	Ball bearing	20	60
VPP 205/20G	200	65	205	Plain bearing	20	60
VPP 250/20-74G	250	60	295	Plain bearing	20	74
VPP 250/25G	250	60	295	Plain bearing	25	65
VPP 250/25-74G	250	60	295	Plain bearing	25	74
VPP 250/25R	250	60	295	Roller bearing	25	65
VPP 250/20K	250	60	295	Ball bearing	20	65
VPP 250/25K	250	60	295	Ball bearing	25	65
VPP 254/25G	250	75	300	Plain bearing	25	65
VPP 254/25R	250	75	300	Roller bearing	25	65
VPP 256/20G	250	85	250	Plain bearing	20	75
VPP 256/20R	250	85	250	Roller bearing	20	75
VPP 300/25G	300	60	250	Plain bearing	25	60
VPP 355/25R	355	75	300	Roller bearing	25	75
VPP 400/25G	400	90	350	Plain bearing	25	75
VPP 400/25R	400	90	350	Roller bearing	25	75

Variants / Accessories



	With non-marking grey tyre	With stainless steel roller bearing	STARLOCK® stainless steel cap
Technical description page	34	57	79
Ref. No. extension	-SG	-XR	ST-KA 20, 25
Available for wheel Ø [mm]	200x50 + 250x60	Upon request	All axle bore Ø

