


Series: LH-SETH, BH-SETH

Pressed steel swivel and fixed castors, heavy duty brackets

500 - 900 kg

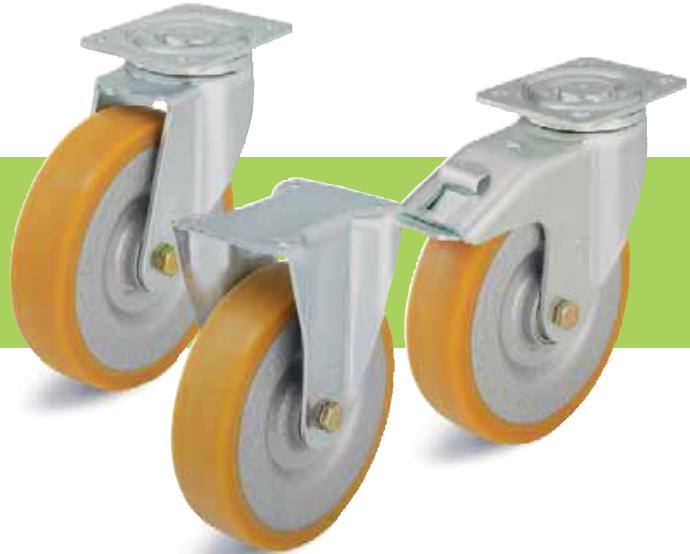

Brackets: LH/BH Series - Pressed from sheet-steel, swivel bracket with heavy fork and top plate, very strong bolted and secured central kingpin, double ball bearing in the swivel head, additionally reinforced by the integration of four specially shaped and hardened bearing seats resulting in a very high resistance to shock and impact loads, bolted wheel axle, zinc-plated.

Top plate drawings: Page 71.
Detailed description: Page 63 and 76.

Wheels: SETH Series - Treads: Made of Blickle Extrathane® polyurethane, firmly bonded, colour light brown, non-marking, 92° shore A, elastic, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance, very good chemical connection with the wheel centre. Wheel centres: Strong welded steel construction with double-welded tubular steel hub, ball bearing. Lacquered - colour silver.
Special Blickle wheel centre construction, very high stability, elegant and smooth design.
Detailed description: Page 224 and 45.

Swivel castors	Fixed castors	Swivel castors with "stop-fix" brake	Wheel Ø [mm]	Wheel width [mm]	Load capacity [kg]	Bearing version	Total height [mm]	Plate size [mm]	Bolt hole spacing [mm]	Bolt hole Ø [mm]	Offset swivel castor [mm]
LH-SETH 125K	BH-SETH 125K	LH-SETH 125K-FI	125	50	500	Ball bearing	170	140 x 110	105 x 75-80	11	55
LH-SETH 150K	BH-SETH 150K	LH-SETH 150K-FI	150	50	650	Ball bearing	197	140 x 110	105 x 75-80	11	65
LH-SETH 160K	BH-SETH 160K	LH-SETH 160K-FI	160	50	700	Ball bearing	202	140 x 110	105 x 75-80	11	65
LH-SETH 200K	BH-SETH 200K	LH-SETH 200K-FI	200	50	900	Ball bearing	245	140 x 110	105 x 75-80	11	70
LH-SETH 250K	BH-SETH 250K	*	250	60	900	Ball bearing	295	140 x 110	105 x 75-80	11	82

* For the "stop-top" brake version, refer to Variants / Accessories.



Variants / Accessories



	With "stop-top" brake	With "ideal-stop" brake tfl. height + 17mm**	With directional lock (retro fit)*** 1 x 360°	With sealing + grease nipple in the swivel head ***	Truck lock
Technical description page	77	77	78	63	78
Ref. No. extension	-ST	-IS	RI-05.03	-DN	FF160 / FF200
Available for wheel Ø [mm]	All sizes	160 + 200	125 - 200	Upon request	160 - 200 Rest upon request

** Matching synthetic adapter plate for total height compensation for swivel and fixed castors without "ideal-stop" brake: Ref. No. AP3.
*** Only for swivel castors without brake.