

Series: GTH, wheel Ø 100 - 250 mm

**Heavy duty wheels
with Blickle Extrathane® polyurethane tread,
cast iron wheel centre**

350 - 2700 kg



Treads: Made of Blickle Extrathane® polyurethane, firmly bonded, colour light brown, non-marking, 92° shore A, elastic, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance, very good chemical connection with the wheel centre.

Wheel centres: Made of grey cast iron, very rugged, ball bearing, grease nipple for wheel Ø of 150 mm or larger. Lacquered - colour silver.
Detailed description: Page 45.

Wheels

Ref. No.	Wheel Ø (D) [mm]	Wheel width (T2) [mm]	Load capacity [kg]	Bearing version	Axle bore Ø (d) [mm]	Hub length (T1) [mm]
GTH 100/15K	100	40	350	Ball bearing	15	40
GTH 101/20K	100	50	450	Ball bearing	20	60
GTH 125/15K	125	40	450	Ball bearing	15	45
GTH 127/20K	125	50	550	Ball bearing	20	60
GTH 150/20K	150	50	700	Ball bearing	20	60
GTH 160/20K	160	50	750	Ball bearing	20	60
GTH 160/25K	160	50	750	Ball bearing	25	60
GTH 175/20K	175	50	800	Ball bearing	20	60
GTH 175/25K	175	50	800	Ball bearing	25	60
GTH 177/25K	175	80	1200	Ball bearing	25	80
GTH 200/20K	200	50	1000	Ball bearing	20	60
GTH 200/25K	200	50	1000	Ball bearing	25	60
GTH 202/25K	200	80	1400	Ball bearing	25	90
GTH 202/30K	200	80	1400	Ball bearing	30	90
GTH 202/35K	200	80	1400	Ball bearing	35	90
GTH 251/25K	250	50	1100	Ball bearing	25	60
GTH 250/25K	250	60	1350	Ball bearing	25	70
GTH 250/30K	250	60	1350	Ball bearing	30	70
GTH 252/25K	250	80	1800	Ball bearing	25	90
GTH 252/30K	250	80	1800	Ball bearing	30	90
GTH 254/40K	250	130	2700	Ball bearing	40	140

For further wheel Ø, refer to the following page.

12

Further information on the internet: www.blickle.de

Variants / Accessories




Further dimensions

Technical description page

Ref. No. extension

Available for wheel Ø [mm] Upon request

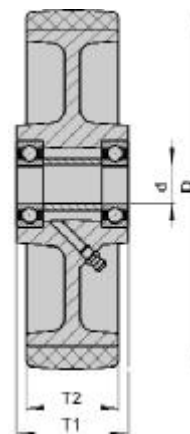

Series: GTH, STH, wheel Ø 300 - 600 mm

**Heavy duty wheels
with Blickle Extrathane[®] polyurethane tread,
cast iron or welded steel wheel centre**

👤 1200 - 8000 kg



Treads: Made of Blickle Extrathane[®] polyurethane, firmly bonded, colour light brown, non-marking, 92° shore A, elastic, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance, very good chemical connection with the wheel centre.

Wheel centres: GTH series: Made of grey cast iron, very rugged, ball bearing, grease nipple. Lacquered - colour silver.
STH series: Very strong welded steel construction with double-welded tubular steel hub, ball bearing, grease nipple. Lacquered - colour silver.
Detailed description: Page 45.

Wheels

Ref. No.	Wheel Ø (D) [mm]	Wheel width (T2) [mm]	Load capacity [kg]	Bearing version	Axle bore Ø (d) [mm]	Hub length (T1) [mm]
GTH 301/25K	300	45	1200	Ball bearing	25	60
GTH 300/30K	300	60	1600	Ball bearing	30	70
GTH 302/30K	300	80	2000	Ball bearing	30	90
GTH 302/35K	300	80	2000	Ball bearing	35	90
GTH 304/35K	300	100	2500	Ball bearing	35	120
GTH 360/35K	360	60	1700	Ball bearing	35	75
GTH 362/40K	360	75	2200	Ball bearing	40	90
GTH 364/40K	360	120	3300	Ball bearing	40	120
GTH 400/35K	400	60	1900	Ball bearing	35	75
GTH 402/40K	400	80	2500	Ball bearing	40	90
GTH 404/40K	400	100	3100	Ball bearing	40	120
GTH 406/50K	400	125	4000	Ball bearing	50	125
STH 500/60K	500	150	5300	Ball bearing	60	150
STH 600/80K	600	200	8000	Ball bearing	80	200

Variants / Accessories



Further dimensions

Technical description page

Ref. No. extension

Available for wheel Ø [mm]

Upon request

