

Series: ALEV, ALTH, PO
Steer wheels for pallet trucks

450 - 800 kg



ALEV series: Elastic solid rubber tyres, colour black, smooth rolling quality, 65° shore A, firmly vulcanised onto a wheel centre made of aluminium die-cast, ball bearing.
Detailed description: Page 37

ALTH series: Tread made of **Blickle Extrathane®** polyurethane, colour light brown, non-marking, 92° shore A, elastic, abrasion-resistant, firmly bonded onto a wheel centre made of aluminium die-cast, ball bearing.
Detailed description: Page 44


PO series: Made of high-quality nylon, colour natural white, high abrasion resistance, low rolling resistance, shock and impact-resistant, corrosion-resistant, ball bearing.
Detailed description: Page 47.

Wheels

Ref. No.	Wheel Ø (D) [mm]	Wheel width (T2) [mm]	Load capacity [kg]	Ball bearing	Axle bore Ø (d) [mm]	Hub length (T1) [mm]	Clamping length (T5) [mm]
ALEV series							
ALEV 200x50/20-54K	200	50	450	6204 ZZ	20	60	54
ALEV 200x50/25-50K	200	50	450	6005 ZZ	25	60	50
ALTH series							
ALTH 180x50/20-54K	180	50	600	6204 ZZ	20	60	54
ALTH 180x50/25-50K	180	50	600	6005 ZZ	25	60	50
ALTH 200x50/20-40K	200	50	800	6204 ZZ	20	50	40
ALTH 200x50/20-54K	200	50	800	6204 ZZ	20	60	54
ALTH 200x50/25-36K	200	50	800	6005 ZZ	25	50	36
ALTH 200x50/25-50K	200	50	800	6005 ZZ	25	60	50
PO series							
PO 200x50/20-54K	200	50	600	6204 ZZ	20	60	54
PO 200x50/25-50K	200	50	600	6005 ZZ	25	60	50

Variants / Accessories

	With stainless steel ball bearing
Technical description page	57
Ref. No. extension	-XK
Available for wheel Ø [mm]	Upon request

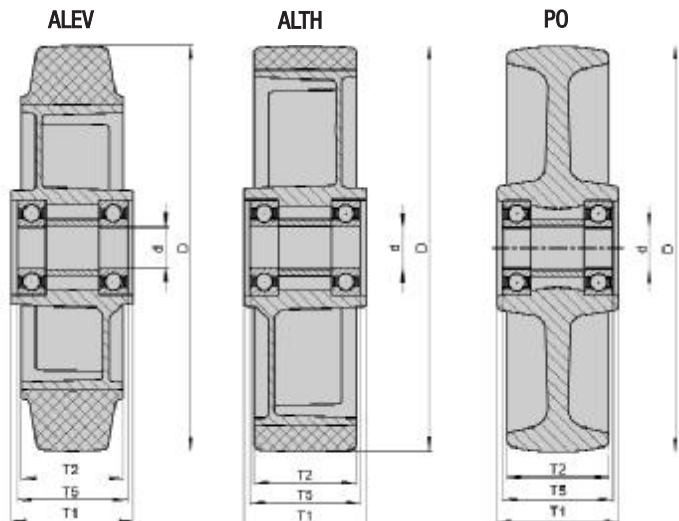

Further information on the internet: www.blickle.de