



Series: FTH

**Guide rollers
with Blickle Extrathane® polyurethane tread**

15 - 100 kg



Treads: Made of Blickle Extrathane® polyurethane, firmly bonded, colour light brown, non-marking, 92° shore A, elastic, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance, very good chemical connection with the ball bearing.

Wheel centres: Ball bearing in acc. with DIN 625
Detailed description: Page 56.

Guide rollers


Ref. No.	Wheel Ø (D) [mm]	Wheel width (T2) [mm]	Load capacity [kg]	Ball bearing	Axle bore Ø (d) [mm]	Clamping length (T1) [mm]
FTH 30x8/6-6K	30	8	15	626 2RS	6	6
FTH 30x11/9-7K	30	11	20	609 2RS	9	7
FTH 34x16/8-7K	34	16	25	608 ZZ	8	7
FTH 35x14/12-8K	35	14	30	6001 2RS	12	8
FTH 36x13/10-9K	36	13	30	6200 2RS	10	9
FTH 40x15/10-9K	40	15	30	6000 2RS	10	8
FTH 40x20/10-9K	40	20	35	6200 ZZ	10	9
FTH 45x17/15-11K	45	17	50	6202 ZZ	15	11
FTH 50x15/10-9K	50	15	45	6200 ZZ	10	9
FTH 50x15/12-12K	50	15	55	6301 2RS	12	12
FTH 50x18/15-11K	50	18	55	6202 ZZ	15	11
FTH 52x15/12-12K	52	15	55	6301 2RS	12	12
FTH 60x20/17-12K	60	20	70	6203 2RS	17	12
FTH 61x30/17-12K	61	30	80	6203 2RS	17	12
FTH 62x15/20-12K	62	15	65	6004 2RS	20	12
FTH 62x15/25-12K	62	15	65	6005 2RS	25	12
FTH 70x20/25-15K	70	20	95	6205 2RS	25	15
FTH 75x23/20-14K	75	23	100	6204 2RS	20	14

Further information on the internet: www.blickle.de

Variants / Accessories



Further dimensions

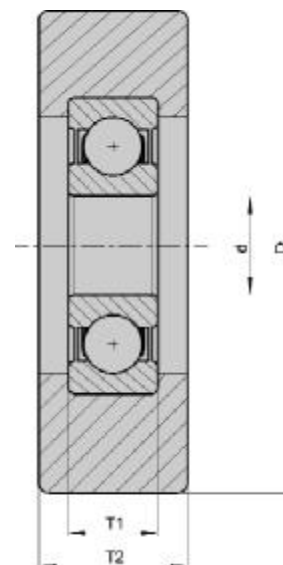

Technical description page

23

Ref. No. extension

Upon request